

# RECON

In This DIY I Will Explain How To Replace The H3 Bulb In **RECON: Backup Projectors**


**Tools Required:** Medium – Small, Sized Phillips Screwdriver

**What You Need To Get:** New H# 55W Bulb


---

You Will First Need To Remove The Two Phillips Screws On The Side of Your Recons. \*NOTE The Order of The Washers. – Disconnect The Terminals.

- Place Your Projector On A Solid Surface To Work On
- Flip The Projector Upside Down – To Expose The Silver Access Plate

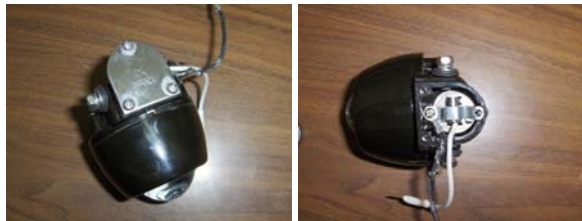

- Remove The 3 Phillips Screws To Remove The Access Plate – Set Aside.
- Examine How The Bulb Is Installed From The Factory
- Remove The Screw Holding The Ground Terminal & The Bulb Keeper – Set Aside

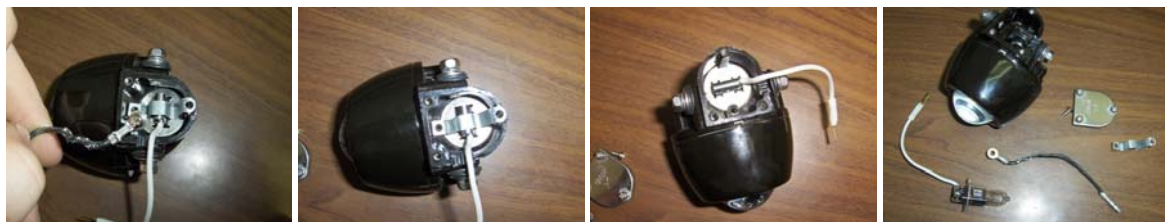

- Remove The Bad Bulb, Wiggle Back And Fourth Until Bulb Separates From The Housing
- Install The New Bulb
- Reassemble Following Tear Down Procedure.
- The Ground and Power Wire Have Channels To Lay In
- Be Sure The Cover Plate and Gasket Have A Good Seal, Be Sure Not To Over Tighten.

**Visit Us Online at: [www.GoRECON.com](http://www.GoRECON.com)**